# XS-V1635M

*6 1/2″ 3-Way Speakers*

- 200 W Max Input Power
- 6 1/2″ Highly Oriented Polyolefine Woofer
- 2″ Aluminum Cone Midrange
- 1/2″ PEI Film Dome Tweeter
- Center-Run Mid/Tweet Wire Path
- Rigid 1.2mm Steel Frame
- 2 1/4″ Mounting Depth

**Specifications**

| | |
|---|---|
| Speaker | Coaxial 3-way |
| | Woofer: 15.8 cm (6 1/4 in.), HOP cone type<br>Midrange: 5 cm (2 in.), HOP cone type<br>Tweeter: 1.3 cm (17/32 in.), PolyEtherImide (PEI) film dome |
| Maximum Input Power | 200 watts |
| Rated Input Power | 45 watts |
| Impedance | 4 ohms |
| Sensitivity | 90 dB/W/m |
| Frequency Response | 30-26,000 Hz |
| Crossover Frequency | N/A |
| Weight (per speaker) | Approx. 1.16 kg (2 lb. 9 oz.) |

**XS-V1635M Dimensions**

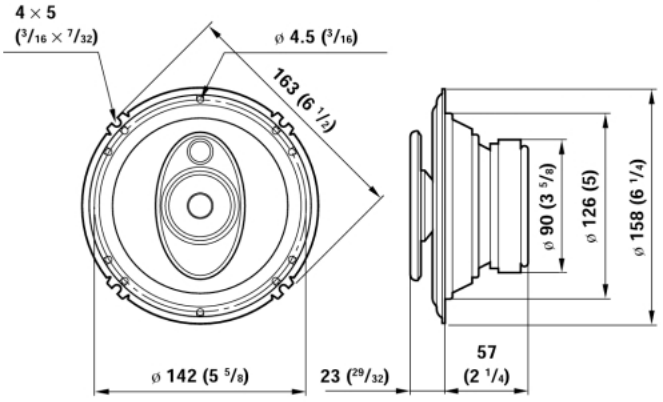


*Design and specifications subject to change without notice.*